


# PHOENIX® DWT SERIES

Wet-Location Task Light

*docklite*®

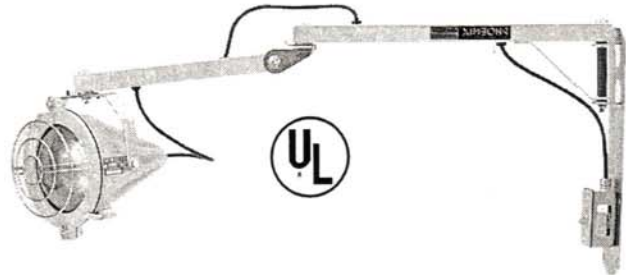

**DESCRIPTION:** The *DWT Series* is a Wet-Location model that's ideal for use outdoors or in wet indoor environments. Available with incandescent, high pressure sodium, and metal halide heads.

## SPECIFICATIONS

- **HOUSING:** Rugged, cast aluminum housing is copper-free for greater corrosion resistance; thermoset powder-coated seals out the elements.
- **HARDWARE:** Zinc-plated steel hardware resists corrosion.
- **TWIST GUARD:** Limits head rotation to prevent cord tangling.
- **TOUCH CONTROL:** Vertical and horizontal positioning of head.
- **LAMPS:** Accepts medium screw base R-40 and PAR38 incandescent type lamps to 300 watt maximum. 70 watt HPS and MH ED17 lamps, and 70 watt double-ended MH lamps.
- **LENS:** Tempered glass lens and wire lens guard standard.

- **WIRING:** 3-conductor grounded cord from fixture to switch on wall bracket with weather-tight fitting that seals out moisture around cord.
- **SWITCH:** Pre-wired weather-proof switch included.
- **ARMS:** 1 1/2" square steel tube arms with wrist-action joint available in 42", 60", or 90" reach.
- **RELAMPING:** Two easy-open snap clips and hinged door for tool free relamping.
- **EPDM GASKET:** EPDM gasket seals out dirt and moisture.

## 3 YEAR WARRANTY

A three-year Limited Warranty against defects in material and workmanship. See Standard Terms and Conditions for details.

## ORDERING INFORMATION

SERIES	WATT/TYPE	PART	LENGTH	OPTIONS (120V Standard)
DL	INC	DWT	42	277
DL	INC 70MH/DE 70HPS 70MH	DWT	42 60 90	277'

### WATTAGE/TYPE

INC = Incandescent (PAR38/BR40; 300W max.)  
 HPS = High Pressure Sodium  
 MH = Metal Halide  
 MH/DE = Metal Halide/Double-Ended

### PART

DWT = Docklite Weather-Tight


### LENGTH

42 = 42" Arm  
 60 = 60" Arm  
 90 = 90" Arm

### OPTIONS

277V = 277 Volt  
 \*Available on HPS and MH models only.  
 120 Volt standard.

## DIMENSIONS

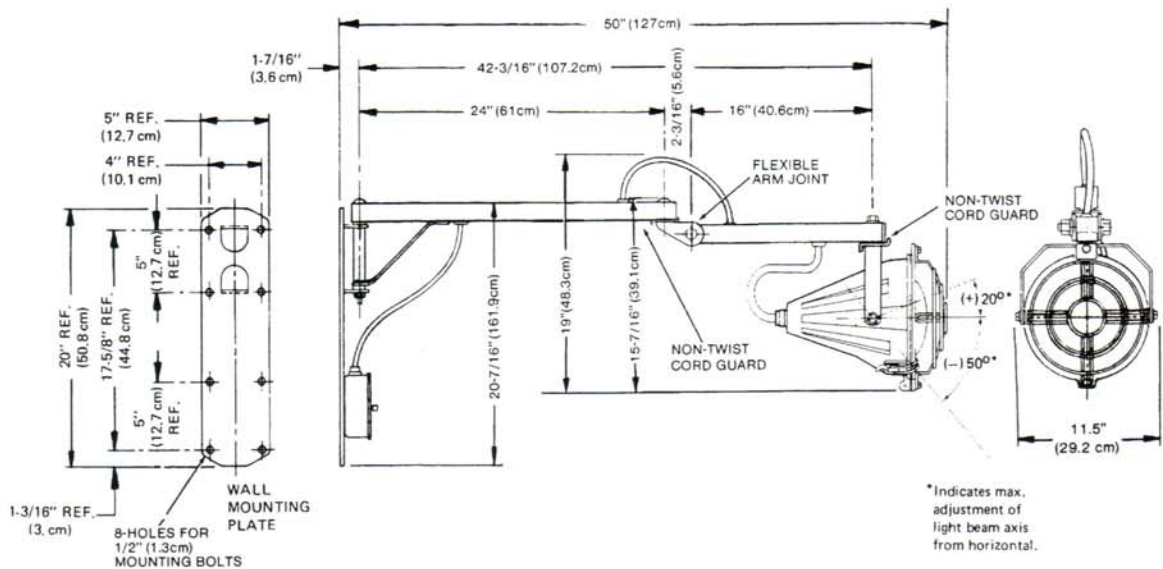

## LAMPING DATA

Fixture	Type	Watts	Bulb	Base	Phoenix Part No.
INC	Incandescent/Halogen PAR	Up to 300	PAR 38/BR40	Med. Skt/Med.	4220043 QH90PAR 4220044 QH250PAR
70MH	MH/DE	70	T6	RSC	4220028
70HPS	HPS	70	ED17	Med.	4212600
70MH	MH	70	ED17	Med.	4220031

## TECHNICAL DATA

- **WIRING:** 3-conductor grounded cord from fixture to switch on wall bracket with weather-tight fitting that seals out moisture around cord.
- **WEIGHT IN POUNDS (kg):**

	42"	60"	90"
Incandescent	30(13.6)	36(16.3)	46(20.9)
MH and HPS	36(16.3)	42(19.1)	52(23.6)
- **COLOR:** Safety Yellow

## SAMPLE SPECIFICATION

Wet location task light. Accepts medium screw base R-40 and PAR 38 incandescent type lamps to 300 watt maximum. 70 watt HPS and MH ED17 lamps, and 70 watt double-ended MH lamps. UL Listed. Meets Standard 1571 or 1572 - Suitable for Wet Locations. CSA Certified. Copper-free, cast aluminum housing and heavy gauge steel arm, both thermoset powder-coated. Steel wall mounting bracket. Weather-proof power switch included. Zinc-plated steel hardware. Non-twist cord. Dual swing arms (42", 60", or 90" reach). Glass lens and wire lens guard standard. EDPM gasket.

## COMPLIANCES



**UL 1571 Listed:** Suitable for wet locations.  
**UL 1572 Listed:** Suitable for wet locations.



**CSA Certified:** Indoor/Outdoor  
 NRTL: UL 1571 or UL 1572  
 Suitable for Wet Locations

N-5610185B