

Toll Free  
800-888-9750



Materials Safety  
Data Sheet  
(MSDS)

## Weld Screen & Curtain Film

### 14 Gauge to 40 Gauge

**DPC or DPT:** Double Polished Clear or Tinted

**2S or 3S:** Level of Softness

**LD:** Lightly Dusted

**LC:** TMI Exclusive Low Cohesion Formula



-  [Main Menu](#)
-  [Grade Menu](#)

Click for  
Specifications  
↓

Thickness	Roll Size	Net Roll Weight*	Description	
<i>Clears</i> .014"	66" x 101 Yds	150 Lbs	<b>DPC-3S-LC-P72</b>	<b>SPEC</b>
	74.5" x 89 Yds	150 Lbs	<b>DPC-3S-LC-P72</b>	<b>SPEC</b>
	66" x 101 Yds	150 Lbs	<b>DPC-3S-LD-P83</b>	<b>SPEC</b>
	74.5" x 89 Yds	150 Lbs	<b>DPC-3S-LD-P83</b>	<b>SPEC</b>
<i>14 mil Weld Tints</i> .014"	<i>Aztec Red, Yellow, Charcoal, Dark Green Shade 8, Blue</i>			
	66" x 101 Yds	150 Lbs	<b>DPT-2S-LD-WCO</b>	<b>SPEC</b>
	74.5" x 89 Yds	150 Lbs	<b>DPT-2S-LD-WCO</b>	<b>SPEC</b>
<i>40 mil Weld Tints</i> .040"	<i>Aztec Red, Amber</i>			
	66" x 36 Yds	150 Lbs	<b>DPT-3S-W83</b>	<b>SPEC</b>

\* Add 12 lbs. to the net roll weight for the gross shipping weight



#### Available Converting Services

- Rewinding & Put-Up Changes
- Slitting and Sheeting
- Tissue Interleaving

**SAVE-T® PVC**

- Ideal for Industrial Curtains
- Complies with OSHA Requirements
- RF Heat Sealable
- Certified Fire Retardant Rating
- Boxed to Ensure Quality
- 3" Inside Diameter Core
- Consult TMI for Samples
- Call for specific details

#### Special Orders

TMI, LLC can develop a stocking program to meet your exact requirements.

See Specular Transmission  
Graph Below

**Vinyl Solutions**  
a division of TMI, LLC

5350 Campbells Run Road  
Pittsburgh, PA 15205-9738

• fax: 412-787-3665 • web: www.tmivinylsolutions.com • e-mail: vinylsolutions@tmi-pvc.com



Toll Free  
800-888-9750

International  
412-787-9750

TMI, LLC © 2007

Toll Free  
800-888-9750




◀ Main Menu

◀ Grade Menu

## SAVE-T® Weldscreen

### Fire and UV Radiation Resistance Information

SAVE-T® Weldscreen protects against the effects of near UV and UV radiation emitted during arc welding. The material is fire retardant; see Specification Sheet for details.

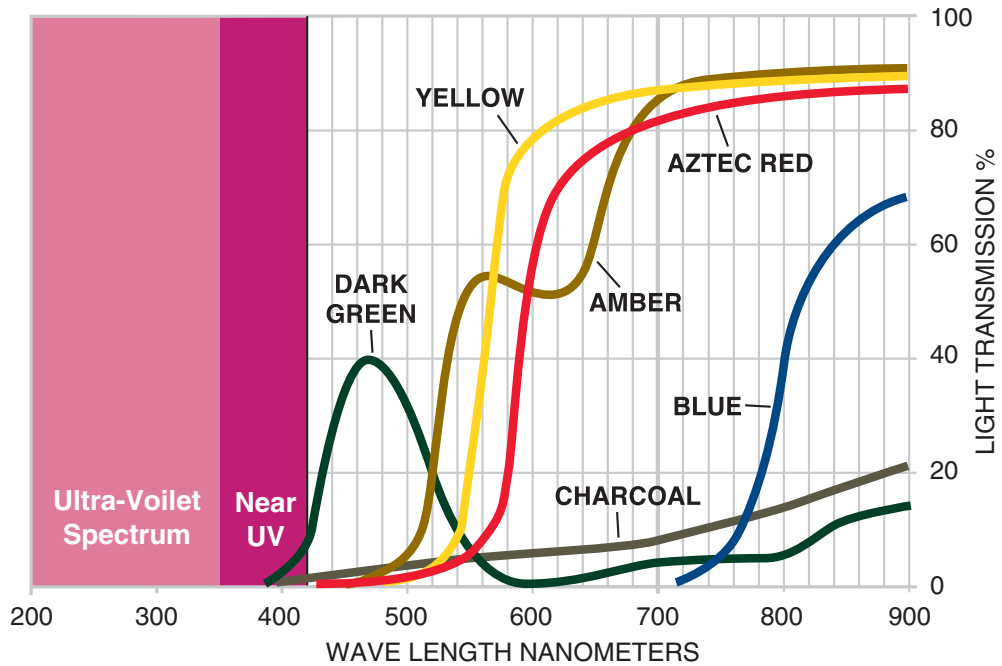

– NOTE –

SAVE-T® Weldscreen is not intended as a substitute for proper eye protection for direct viewing of welding arcs at close range.

– CLEANING –

To clean SAVE-T® PVC screen material use soapy water and rinse. For deep cleaning, apply a mixture of 95% water and 5% ethanol with a soft cloth or sponge, and wash thoroughly to minimize plasticizer extraction.

Toll Free  
800-888-9750

International  
412-787-9750

TMI, LLC © 2007

**Vinyl Solutions**  
a division of TMI, LLC

5350 Campbells Run Road  
Pittsburgh, PA 15205-9738

• fax: 412-787-3665 • web: [www.tmivinylsolutions.com](http://www.tmivinylsolutions.com) • e-mail: [vinylsolutions@tmi-pvc.com](mailto:vinylsolutions@tmi-pvc.com)

