

Toll Free  
800-888-9750

◀ Main Menu

◀ Grade Menu

◀ Item Menu



## Dark Green Weld Screen Tinted PVC Strip & Sheet

8" to 60"

FDGW: Dark Green Tinted

**All materials are:**  
Compliant with CSFM Fire Rating and OSHA,  
UV Stabilized, Recommended for 0° F to 140° F

[Click for Specifications](#) → **SPEC**

Strip Width	Model No.	Dimensions	Roll Length(s) in feet
Flat 8"	FDGW08080	8" x .080"	300
12"	FDGW12120	12" x .120"	200
16"	FDGW16160	16" x .160"	100
48"	FDGW48040	48" x .040"	150
	FDGW48080	48" x .080"	60
60"	FDGW60040	60" x .040"	100

\* Listed are commonly stocked items only. All sizes are not shown.

[See Specular Transmission Graph Below](#)



### Available Converting Services

- Sheeting
- Interleaving
- Partial Rolls
- Die Cutting
- Flash Cutting

Materials Safety  
Data Sheet  
(MSDS)



**SAVE-T® PVC**

- Protects Against UV Light Emitted During Arc Welding\*
  - High Level of Flexibility for Custom Roll Sizes
  - Boxed to Ensure Quality
  - 6" Inside Diameter Core
  - Consult TMI for Samples
  - Call for Specific Details
- \* *Eye protection should be worn for direct viewing of welding arcs even through this material*

### Special Orders

Custom Roll Sizes  
from .040" to .500" thick  
& from 3" to 60" wide

Toll Free  
800-888-9750

International  
412-787-9750

TMI, LLC © 2007

**Vinyl Solutions**  
a division of TMI, LLC

5350 Campbells Run Road  
Pittsburgh, PA 15205-9738

• fax: 412-787-3665 • web: [www.tmivinylsolutions.com](http://www.tmivinylsolutions.com) • e-mail: [vinylsolutions@tmi-pvc.com](mailto:vinylsolutions@tmi-pvc.com)




Toll Free  
800-888-9750



## SAVE-T® Weld Screen

### Fire and UV Radiation Resistance Information

SAVE-T® Weldscreen protects against the effects of near UV and UV radiation emitted during arc welding. The material meets CPAI - 84 and California Health and Safety Code requirements of the State Fire Marshal Code for flame retardation.

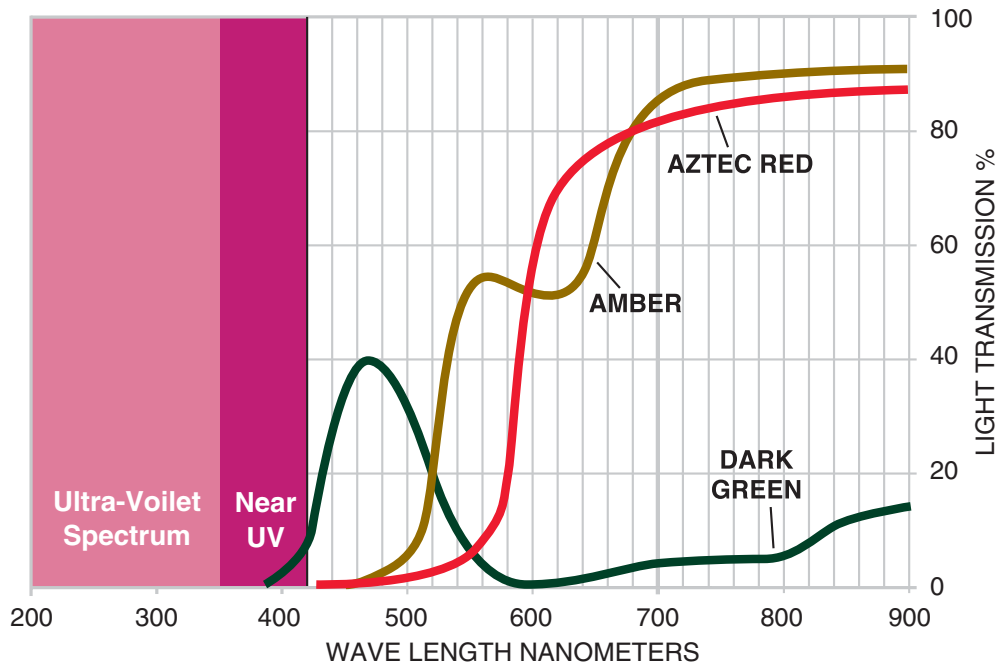

– NOTE –

SAVE-T® Weldscreen is not intended as a substitute for proper eye protection for direct viewing of welding arcs at close range.

– CLEANING –

To clean SAVE-T® PVC screen material use soapy water and rinse. For deep cleaning, apply a mixture of 95% water and 5% ethanol with a soft cloth or sponge, and wash thoroughly to minimize plasticizer extraction.

- ◀ Main Menu
- ◀ Grade Menu
- ◀ Item Menu

Toll Free  
800-888-9750

International  
412-787-9750

TMI, LLC © 2007

**Vinyl Solutions**  
a division of TMI, LLC

5350 Campbells Run Road  
Pittsburgh, PA 15205-9738

• fax: 412-787-3665 • web: [www.tmivinylsolutions.com](http://www.tmivinylsolutions.com) • e-mail: [vinylsolutions@tmi-pvc.com](mailto:vinylsolutions@tmi-pvc.com)

